


Features & Applications

The PDX-2 Mini DL Classic uses High Brightness **CREE LED** as its light source. It is housed in a new modern fixture for easy installation. The lamp comes complete with a Constant Current Driver to ensure consistent brightness and optimal performance. The LED light provides high CRI lighting effect with negligible heat, UV or IR emission. It is ideal for pictures, antiques, jewelries, cosmetics etc. It can be easily applied in showcases, cabinets or under counters.

Dimensions

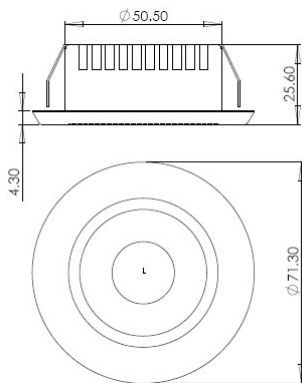


All dimensions in mm

Product Specification

Light Source	3W High Power CREE LED
Driver Type	External Constant Current Driver
Driver Power Input	100~240vac, 50~60 Hz
Power consumption	Max 3W per lamp
Driver Output	700mA
Lumen output per Lamp	Min 137 lm (Day Light)
Intensity per Lamp @ 1m	760 lux (Day Light) on 30 deg Lens
Lens Options	Standard: 30 deg, Custom: 60 deg
Colour Options	Standard: Day Light (Typ 6000K), Warm White (Typ 3000K) Custom: Red, Green, Blue, Amber
Operating Temperature	-5 ~ +40 deg C
Estimated Lamp Life	50,000 hrs

Models

PDX-23YZZ



ZZ	Digits depict lens angle (deg)	30, 60. Standard: 30
Y	Digit depicts number of lamps per set	Standard: 3
X	Alphabet depicts LED colour	B: Day Light, E: Warm White, R: Red, G: Green, L: Blue, Y: Amber
Standard Models: PDB-23330, PDE-23330. MOQ applies for other models		

Prime Light Pte Ltd reserves the right to change the specification without prior notification.