


Features & Applications

- Utilizes high end NICHIA SMD LED to ensure the highest intensity and color consistency
- Comes complete with double sided pressure sensitive adhesive to ensure easy handling and installation
- Extremely Flexible to suit different contoured surfaces
- Applicable for cove, signage, bar top, wall washing, architecture, stretch ceiling and special lightings

Dimensions

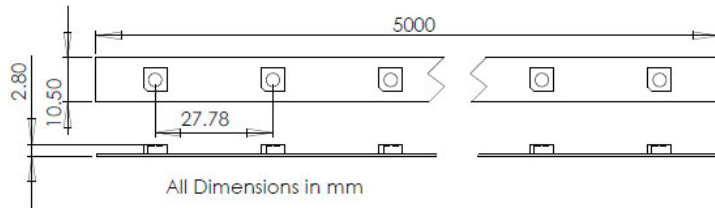

Product Specifications

| | |
|----------------------------------|--|
| Light Source | Nichia 3 in 1 RGB SMD LED, 180 LED/ 5m (PRC-31850) |
| LED Viewing Angle | 115 Deg |
| LED Luminous Intensity (Per LED) | Red: Typ @ 700 mcd Green: Typ @ 1200 mcd Blue: Typ @ 400 mcd |
| Nominal Operating Voltage | 24 Vdc |
| Power Consumption | Max: 45W per reel for PRC-31850 (5m) |
| Mounting | Pressure Sensitive Adhesive |
| Connecting Wire | 4 Wires Cable |
| External Controllers / Drivers | PCC-3, PCC-51 or PCC-8 |
| Cut Length | 167mm for PRC-31850 |
| Operating Temperature | -5 ~+ 40 deg C |
| Estimated Lamp Life | 50,000 hrs |

Model

| | |
|-----------|---|
| PRC-31850 | 5000mm Length Chameleon Ribbon with 180 LED |
|-----------|---|

Prime Light Pte Ltd reserves the right to change the specification without prior notification.