


Features & Applications

- Utilizes high intensity SMD LED to ensure high intensity and color consistency
- Extremely Flexible to suit different contoured surfaces
- Comes complete with 3M pressure sensitive adhesive tape for easy installation.
- Applicable for cove, signage, bar top, wall washing, architecture and special effect lightings



Dimensions

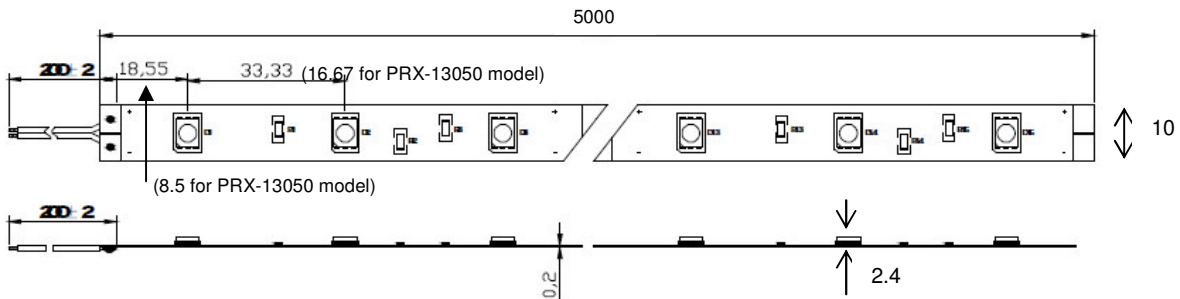

Product Specifications

Models	PRX-11550	PRX-13050
Total Number of LED (5m length)	150	300
Types of LED	3 in 1 SMD LED	
LED Viewing Angle	120 deg	
LED Luminous Flux (per LED)	8.3 lm (white colour)	
Nominal Operating Voltage	12 vdc	24vdc
Power Consumption	7.2 W/m. Max: 36 W/5m reel	14.4W/m. Max: 72W/ 5m reel
Colour Options	RGB, Day Light, Warm White, Amber, Red, Green, Blue	
Estimated Lamp Life	50,000 hrs	
Mounting	3M Pressure Sensitive Adhesive Tape	
PCB colour	Brown / White	White
Standard Length Per Reel	5000mm (cuttable every 100mm)	
Operating Temperature	-5 ~+ 30 deg C	

Models

PRX-1YY50

YY	15, 30	15: 150 LED/5m reel, 30: 300 LED/5m reel
X	Alphabet depicts LED colour	C: RGB, B: Day Light, E: Warm White, R: Red, G: Green, L: Blue, Y: Amber

Prime Light Pte Ltd reserves the right to change the specification without prior notification.