



Features & Applications

- Fully sealed for waterproof application
- Utilizes high intensity SMD LED to ensure high intensity and color consistency
- Extremely Flexible to suit different contoured surfaces
- Applicable for cove, signage, bar top, wall washing, architecture and special effect lightings

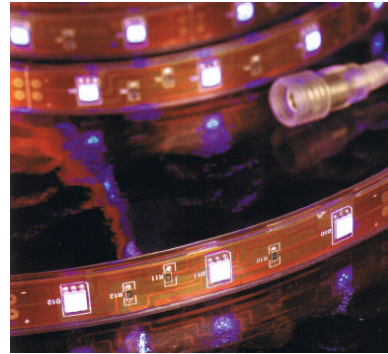

Dimensions

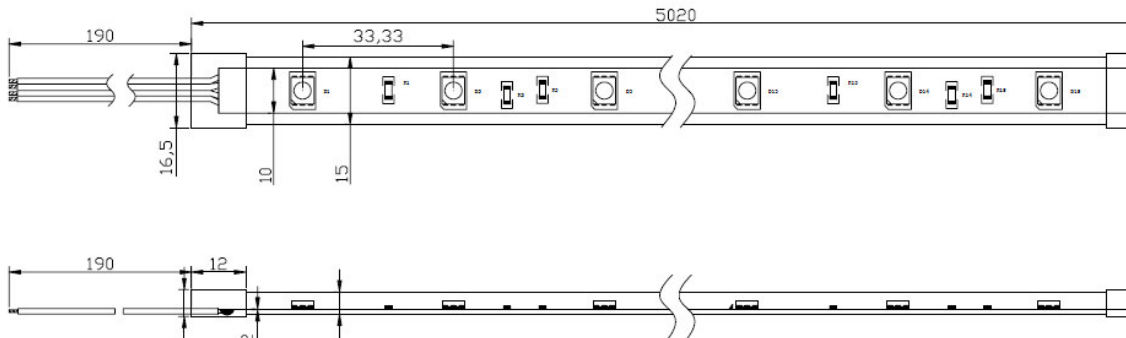

Product Specifications

Total Number of LED (per standard reel)	150
Types of LED	3 in 1SMD LED
LED Viewing Angle	120 deg
LED Luminous Flux (per LED)	8.3 lm (white colour)
Nominal Operating Voltage	12 vdc
Power Consumption	7.2w per meter / Max: 36 w per reel (5m)
Estimated Lamp Life	50,000 hrs
Mounting	Plastic Clip
Standard Length Per Reel	5000mm
Operating Temperature	-5 ~+ 40 deg C

Models

PRX-1150WE

X	Alphabet depicts LED colour	C: RGB, B: Day Light, E: Warm White, R: Red, G: Green, L: Blue, Y: Amber
---	-----------------------------	---

Prime Light Pte Ltd reserves the right to change the specification without prior notification.