


**Features & Applications**

- Utilizes high intensity SMD LED to ensure high intensity and color consistency
- Extremely Flexible to suit different contoured surfaces
- Comes complete with 3M pressure sensitive adhesive tape for easy installation.
- Applicable for cove, signage, bar top, wall washing, architecture and special effect lightings



**Dimensions**

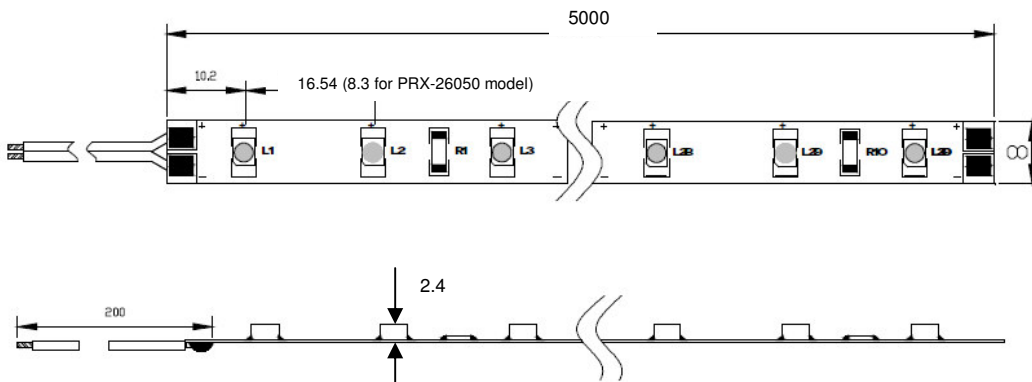

**Product Specifications**

Models	PRX-23050	PRX-26050
Total Number of LED (5m length)	300	600
Types of LED	Top LED	
LED Viewing Angle	120 deg	
LED Luminous Flux (per LED)	2.3 lm (white colour)	
Nominal Operating Voltage	12 vdc	24vdc
Power Consumption	4.8 W/m. Max: 24 W/5m reel	9.6W/m. Max: 48W/5m reel
Colour Options	Day Light, Warm White, Amber, Red, Green, Blue	
Estimated Lamp Life	50,000 hrs	
Mounting	3M Pressure Sensitive Adhesive Tape	
PCB colour	Brown / White	White
Standard Length Per Reel	5000mm (cuttable every 50mm)	
Operating Temperature	-5 ~+ 40 deg C	

**Models**

**PRX-2YY50**

YY	30, 60	<b>30:</b> 300 LED/5m reel, <b>60:</b> 600 LED/5m reel
X	Alphabet depicts LED colour	<b>C:</b> RGB, <b>B:</b> Day Light, <b>E:</b> Warm White, <b>R:</b> Red, <b>G:</b> Green, <b>L:</b> Blue, <b>Y:</b> Amber

Prime Light Pte Ltd reserves the right to change the specification without prior notification.