


**Features & Applications**

The MiniFlood is a small versatile flood lamp designed to provide focus illumination. Fitted with high power LED, it allows customization of different angle lens for different applications. It also comes in dimmable and RGB versions. It is suitable for mood lighting, wall washing, stage lighting and many other effect lighting needs.

**Dimension**

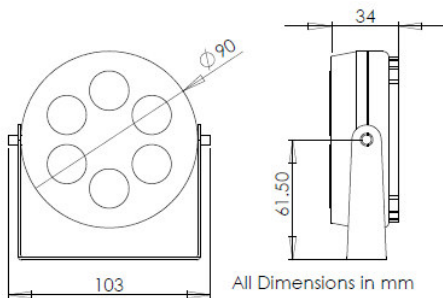

**Product Specifications**

Models	Mono	Mono Dimmable	RGB
Light Source	6x 1W High Power CREE LED		6x 1W High Power Luxeon LED
Power Input	Max 7.2W (lamp only)	Max 7.5W, 24VDC	Max 8.5W, 24VDC
Lumen per Lamp	480 lm (Day Light)		-
Intensity per Lamp @ 1m	1,600 lux (Day Light) on 30 Deg Lens		-
Lens Options	Standard: 30 deg, Custom: 60 deg		Standard: 60 deg Custom: 30 deg
Colour Options	Standard: Day Light (Typ 6000K), Warm White (Typ 3000K). Custom: Red, Green, Blue, Amber		RGB
Control Options	External Driver, 110~240VAC	PCM-2, PCC-8	PCM-1, PCC-3, PCC-51, PCC-8
Operating Temperature	-5~40 deg C		
Estimated Lamp Life	50,000 Hrs		

**Models**

**PFW-36XYZ**

Z	Alphabet depicts model type	D: Dimmable, i: RGB
YY	Digits depict lens angle (deg)	30, 60
X	Digits depict availability of external driver	1, 0 (none)
W	Alphabet depicts LED colour	<b>C:</b> RGB, <b>B:</b> Day Light, <b>E:</b> Warm White, <b>R:</b> Red, <b>G:</b> Green, <b>L:</b> Blue, <b>Y:</b> Amber

Prime Light Pte Ltd reserves the right to change the specification without prior notification.